high-wave low-wave

Design Hannes Wettstein



A series of different shaped beds; the interior part of the headboard can be tilted to provide an adjustable tabletop area. The bed, thanks to the crosspieces connecting the bed guides, can support single or divided mattress-bases, and the height of the base can be adjusted. The High-Wave model is also available with a bed-base storage container.

Available finishes

fabric, leather

Materials

Structure

Made of solid wood and multilayered wooden panels upholstered with shaped polyurethane and covered in double-layer velveteen. **Head rest**

Metallic framework with elastic straps upholstered with polyurethane covered in foam rubber. Cover in double-layer velveteen.

Bases (for bed-base storage container)

Melamine finished chipboard panelling with nylon positioning handles.

High feet

Steel structure covered with shiny chrome plastic material. Supports in antiskid plastic.

Low feet

Chrome-plated steel with supports in anti-skid plastic.


Internal crosspieces


Varnished metal.

Mattress-base spacer

Plastic.

External removable slipcovers Removable Low-Wave The drawing refers to the fabric versions

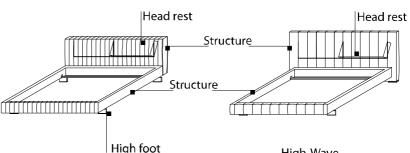




High-Wave

Molteni&C


Design Hannes Wettstein

Types

High-Wave Beds taking double mattress-bases and two single mattress-bases



Low-Wave Beds taking double mattress-bases and two single mattress-bases




The fabric versions are quilted. The leather versions are not quilted but provided with micro-holes on the sides.

Double bed with tilting mattress-base and container under the mattress-base



Model with headboard with reclining inside part




The fabric versions are quilted. The leather versions are not quilted but provided with micro-holes on the sides.

neasurements in centimeters

High-Wave dimensions

OUT	ER DIMENSIONS		
L	Width bed base	180 70 7/8" 190 74 3/4" 200 78 3/4"	KS 215 84 5/8"
L1	Width bedhead	200 78 3/4" 210 82 3/4" 220 86 5/8"	KS 235 92 1/2"
Р	Length	220 86 5/8" 230 90 1/2"	KS 225 88 5/8"
Н	Height	104 41"	
H 1	Height bed base	31 12 ¹ /4"	
INNE	R DIMENSIONS	- ·	
L 1	Width	160 63" 170 66 7/8" 180 70 7/8"	KS 195 76 3/4"
P 2	Length	200 78 ³ /4" 210 82 ³ /4"	KS 205 80 3/4"
D	Required height E I I I I I I I I I I I I I I I I I I	7,5 3" 9,5 3 ³ /4" 11,5 4 ¹ /2"	




Low-Wave dimensions

OUTER DIMENSIONS

L	Width	180 70 ⁷ /8" 190 74 ³ /4" 200 78 ³ /4"	QS 180 70 7/8" KS 215 84 5/8"
Р	Length	230 90 1/2" 240 94 1/2""	QS-KS 235 92 1/2"
Н	Height	86 33 7/8"	
H 1	Height bed base	31 12 ¹ /4"	

INNER DIMENSIONS

L 1	Width		160 63" 170 66 7/8" 180 70 7/8"	QS 155 61" KS 195 76 3/4"	centimeters
P 2	Length		200 78 ³ /4" 210 82 ³ /4"	QS-KS 205 80 3/4"	centin
D	Required height to insert slatted base	Side band	7,5 3° 9,5 3 3/4° 11,5 4 1/2°		measurements in



Use and maintenance

This product is intended for domestic use. Do not stand on the bed runners. Avoid maintenance of product components and contact the retailer for all needs. Normal use results in compression of the padded parts during the average lifespan of the product. Do not place the product close to heat in excess of 45°C. Unusual smells emitted by the product when just unpacked are not toxic and will disappear when placed in an aired room. **Foot care**

For ordinary care, use a soft, dry cloth to remove dust. For greasy dirt (fingerprints), we recommend the use of standard glass-cleaning detergents containing ammonia. Avoid products containing solvents and/or spirits and cloths with hard fibres (synthetic/linen) as they could ruin and/or scratch the surfaces. For monthly cleaning of the low feet, treat the surfaces with products specifically suitable for cleaning/polishing metal.

Adjustment of mattress-base height

It is possible to adjust the height of the mattress-bases by using the appropriate spacers. Before positioning the mattress-base, make sure that all the spacers have been correctly positioned.

Mattress-base heig	ıht adjustmen]	
Without spacer	Н	11,5	
With spacer (1)	H1	9,5	Mattress-base spacer
With spacer (2)	H2	7,5	spacer
without spacer (pos. 1)		with spacer (pos. 2)	

Storage compartment

The storage compartment has a capacity of 50kg evenly distributed and has handles for lifting the bottom to clean beneath the bed.

Lifting base to use storage compartment

Use the handle to lift the base; push it down to lower it. Take the utmost care not to hurt your hands when lifting and lowering the base. Do this operation without people or objects on the bed.

Maintenance - Covers

See covers information sheet (in the download section on the web site www.molteni.it).

Low-Wave covers: dry clean only

Disposal

When no longer needed, the product and its components should not be abandoned in unauthorised areas.